


EN	REV	DESCRIPTION	BY	DATE
22-026	M	SEE ECN 22-026	PG	11/29/22

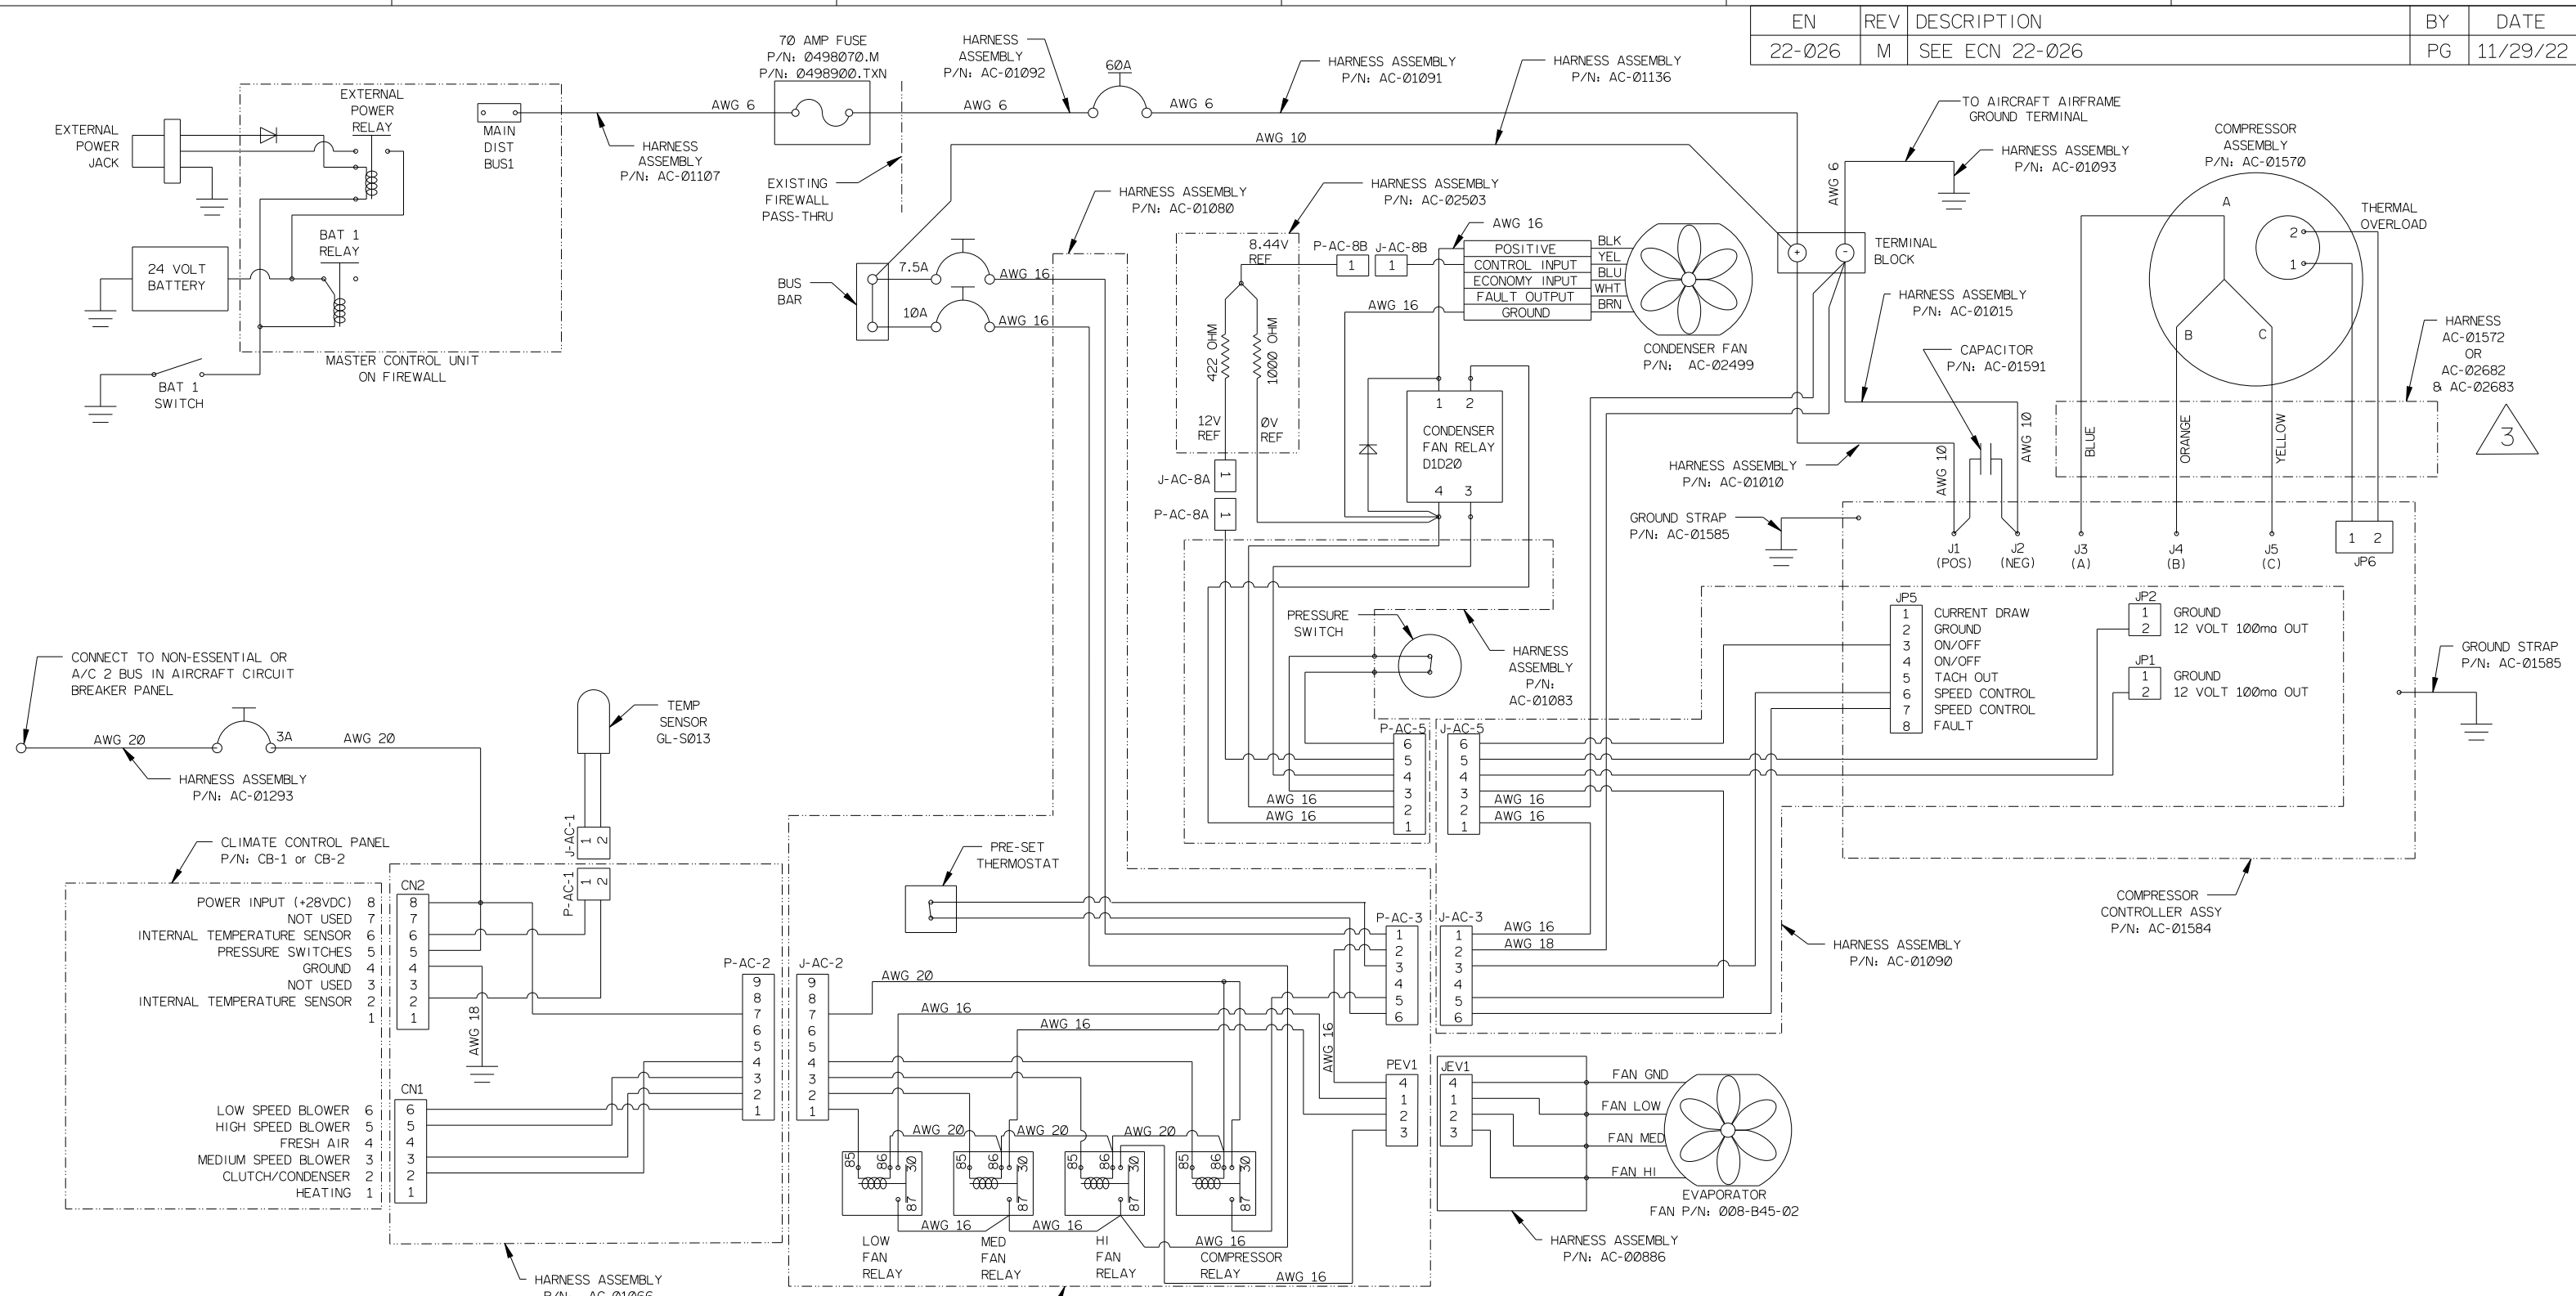

- NOTES:
1. WIRE GAGES SHOWN ARE MINIMUM WIRE SIZES.
 2. WIRES TO BE AWG 22 MINIMUM UNLESS OTHERWISE SPECIFIED.
 3. FOR STANDARD INSTALLATIONS: USE COMPRESSOR HARNESS AC-01572. FOR OPTIONAL NOISE SUPPRESSION INSTALLATIONS: USE COMPRESSOR HARNESSES AC-02682 AND AC-02683.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND APPLY AFTER HEAT TREAT AND PLATING .X = ±.015 .XX = ±.010 .XXX = ±.005 BREAK ALL EDGES AND MACHINE ALL INSIDE CORNER FILLETS .015 MAX. SURFACE FINISH 125/	GEOMETRIC SYMBOLS PER ANSI Y14.5 □ FLATNESS — STRAIGHTNESS ○ ROUNDNESS ⊙ CYLINDRICITY △ PROFILE ⊥ PERPENDICULARITY ⊕ POSITION ◎ CONCENTRICITY ≡ SYMMETRY ∠ ANGULARITY // PARALLELISM ↻ CIRCULAR RUNOUT ↻ TOTAL RUNOUT	DRAWN	JB	5/27/15	 1625 Lost Nation Rd. Willoughby, OH 44094
		CHECKED	EF	5/27/15	
		ENG.	JB	5/27/15	CIRRUS SR20/SR22 AC SCHEMATIC
		FINISH	-		
		WEIGHT	-		DRAWING NO. AC-00995
		MATERIAL	-		
THIS DRAWING CONTAINS INFORMATION THAT IS CONFIDENTIAL AND PROPRIETARY TO KELLY AEROSPACE. THIS DRAWING IS FURNISHED ON THE UNDERSTANDING THAT THE DRAWING AND THE INFORMATION IT CONTAINS WILL NOT BE COPIED OR DISCLOSED TO OTHERS EXCEPT WITH THE WRITTEN CONSENT OF KELLY AEROSPACE. WILL NOT BE USED TO THE DETRIMENT OF KELLY AEROSPACE, AND WILL BE RETURNED UPON REQUEST BY KELLY AEROSPACE.		SCALE:	NTS		
		SIZE	B		
		SH	1		
		OF	1		
		CODE ID	7FUQ0		
		REV.	M		